


# MODEL : GT-H

RATIO : 10.18 ( 單段 1-Stage)



85#~250#

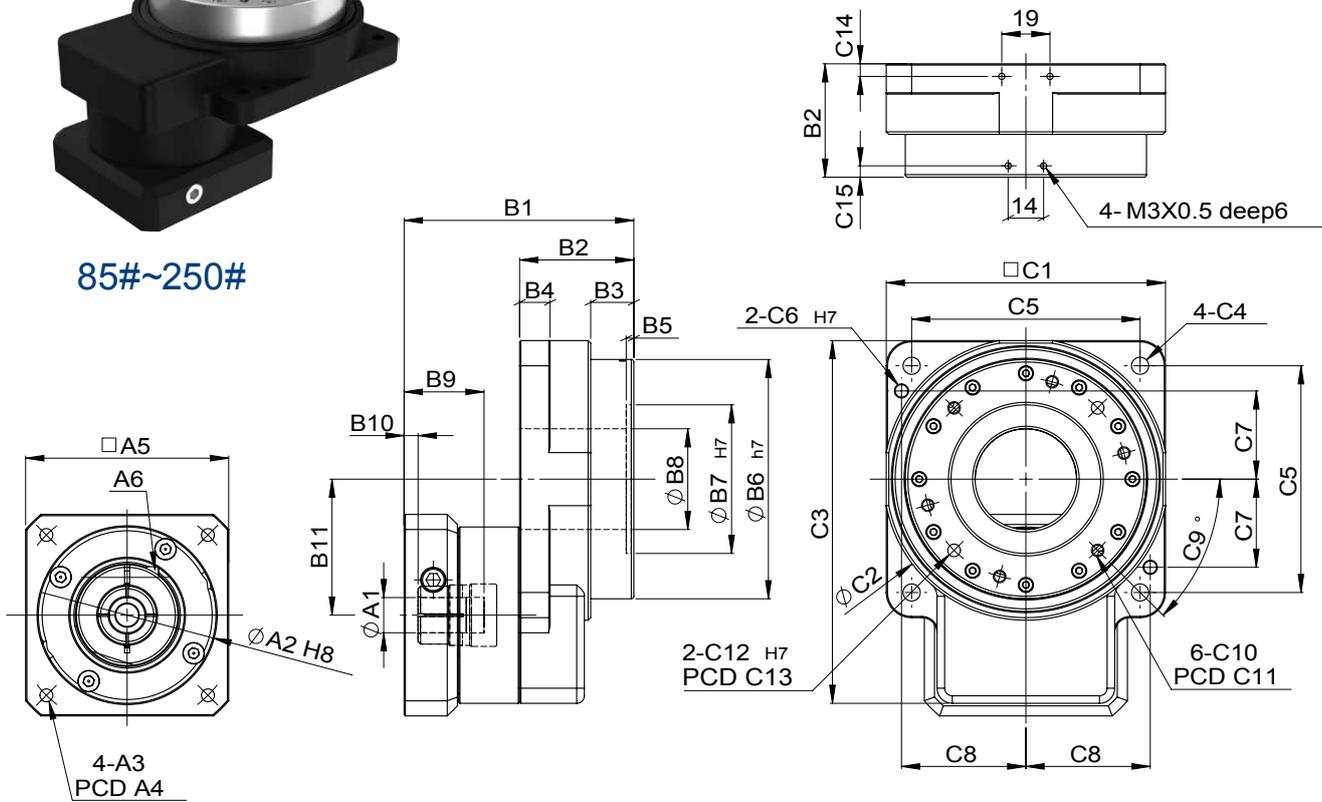

unit: mm



Model Code	60	85	110	135	200	250	
<b>A</b>	A1	8	8·14	14	14·19	19·24	35
	A2	30·40·50	30·40·50	50·60·70	50·60·70	70·80·95·110	95·110·114.3
	A3	M3·M4·M5	M3·M4·M5	M4·M5·M6	M4·M5·M6	M5·M6·M8	M6·M8·M12
	A4	46·63·60	46·63·60	70·75·90	70·75·90	90·100·115·145	115·145·200
	A5	46·55	46·55	64·70·80	64·70·80	92·110·130	122·130·180
	A6	M4 x 0.7	M4 x 0.7	M5 x 0.8	M5 x 0.8	M6 x 1.0	M10 x 1.5
<b>B</b>	B1	66	78.5	90.5	104	125.5·139.5	184
	B2	31	38.5	45	48	70	84
	B3	6	13	17	12	25	27.5
	B4	10	10	12	15	20	25
	B5	2	3	3	3	4	5
	B6	45	70	95	115	170	218
	B7	-	52	59	92	140	160
	B8	26	33	40	63	100	120
	B9	26.5	31	31.5	41	44.5·57.5	82
	B10	6.5	5	5.5	6	8.5·7.5	10
	B11	29.2	41.6	54	66.6	98.5	122
<b>C</b>	C1	60	85	110	135	200	250
	C2	69	87	112	138	202	254
	C3	80.2	110.1	144	169.1	248.5	307
	C4	4.5	5.5	6.8	9	11	13
	C5	50	70	90	110	170	220
	C6	-	4	5	5	8	10
	C7	-	28	35	45	68	90
	C8	-	38	49	60	85	110
	C9	30	30	45	30	30	30
	C10	M4 x 0.7	M4 x 0.7	M5 x 0.8	M5 x 0.8	M6 x 1.0	M8 x 1.25
	C11	38	62.5	80	104	155	200
	C12	5 deep6	5 deep6	5 deep5	5 deep5	8 deep8	8 deep14.5
	C13	36	62.5	80	104	155	200
	C14	4	4	5	5.5	9	9
	C15	-	5	4.5	6	12	8

# Characteristic of GT-H 1-Stage Series

## GT-H 單段系列產品特性



60#

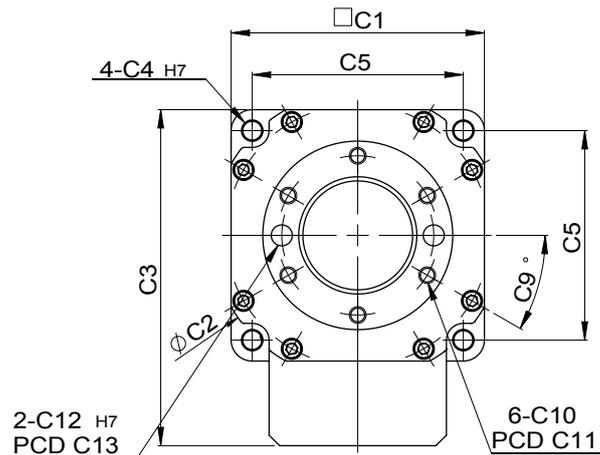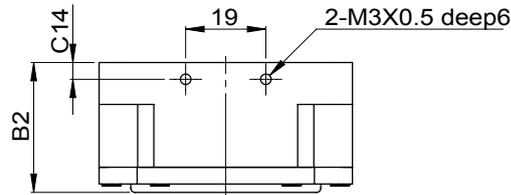

### GT-H 單段減速機 1-Stage

特性 Parameter	Code	Unit	Ratio	60H	85H	110H	135H	200H	250H
輸出平台支撐軸 / Output Table Supporting Bearing			10 · 18	深溝滾珠軸承 / Ball Bearing	交叉斜角滾柱軸承大中空 / Crossed Roller Bearing				
額定輸出扭矩 / Rated Output Torque (Nominal output torque)	$T_{2N}$	Nm	10 18	4 3	14 10	26 19	34 25	183 128	334 234
最大加速扭矩 / Max. Acceleration Torque	$T_{2B}$	Nm	10 · 18	1.5 倍額定輸出扭矩 1.5 Times of Rated Output Torque					
最大輸出扭矩 / Max. Output Torque 急停扭矩 / Emergency Stop Torque	$T_{2NOT}$	Nm	10 · 18	2 倍額定輸出扭矩 2 Times of Rated Output Torque					
慣性慣量 / Inertia Moment		kg.m <sup>2</sup>	10 · 18	$777 \times 10^{-7}$	$1203 \times 10^{-6}$	$1483 \times 10^{-6}$	$2772 \times 10^{-6}$	$27619 \times 10^{-6}$	$53551 \times 10^{-6}$
出力容許轉速 / Output Permissible Speed		rpm	10 · 18	300	200	200	200	200	200
回程間隙 / Torsional Backlash		arcmin	10 · 18	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1	≤ 1
動態齒輪差 / Lost Motion		arcmin	10 · 18	2(0.033°)					
重覆定位精度 / Repetitive Positioning Accuracy		arcsec	10 · 18	±10(0.0028°)					
容許載重 / Permissible Thrust Load		N	10 · 18	350	900	1200	2200	4000	5060
容許彎矩負載 / Permissible Moment Load		Nm	10 · 18	7	18	24	45	80	100
工作台面偏擺 / Runout of Output Table Surface		mm	10 · 18	0.01	0.01	0.015	0.015	0.02	0.025
工作同心度 / Runout of Output Table Inner / Outer Diameter		mm	10 · 18	0.01	0.01	0.015	0.015	0.02	0.025
工作平行度 / Parallelism of Output Table		mm	10 · 18	0.02	0.02	0.025	0.025	0.03	0.035
重量 / Weight		kg	10 · 18	0.595	1.1	2.25	3.3	8.5	18